
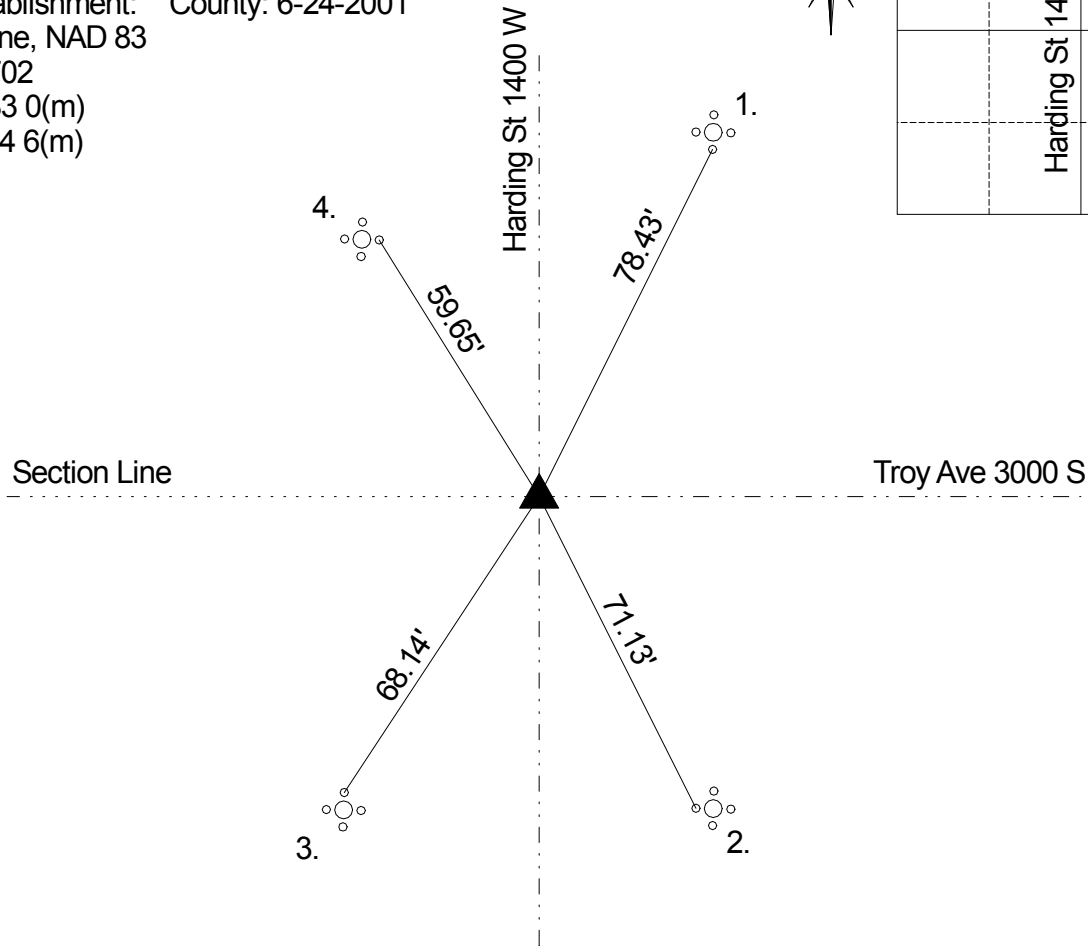


SEC. 27 TWN. 15_N RNG. 3_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

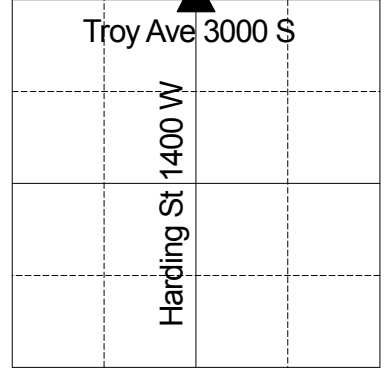

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 12" hackberry bearing N 12° then E 40 links; and a 10" buckeye bearing S 6° then E 12 links (Marion County Atlas pg. 6) A survey by John Coyner on March 21, 1900 indicates a stone set with no witnesses (Perry Legal Book p.6). Corner referenced by Cassady on 2/15/33 and called an iron pin. Corner referenced by Pedigrew on 3/11/40 and called an iron pin. Corner referenced by Monroe on 6/17/52 and called an iron pin. Corner referenced by Monroe on 6/22/56 and called an iron pin Corner referenced by Strabersett on 11/16/71 and called a brass pin. Corner referenced by Miller on 9/25/75 and called a brass plug. Corner referenced by Greene on 11/17/86 and called a brass plug. Corner referenced by Kiste on 7/16/1996 and called a brass plug. Corner referenced by Wilcoxon on 6/24/2001 and called a brass plug. Corner excavated on 4/28/03 and a brass plug was found 3" down. No other points were found. A #205 cast iron Harrison \ monument was set in position as the corner. Retied 7/21/09 by Wilcoxon.

REF.	DISTANCE	DESCRIPTION
1.	78.43'	Cut 'x' S bolt of aluminum pole base
2.	71.13'	Cut 'x' W bolt of aluminum pole base
3.	68.14'	Cut 'x' N bolt of aluminum pole base
4.	59.65'	Cut 'x' E bolt of aluminum pole base